





MUST KNOW
**PROGRAMMING
SYMBOLS**

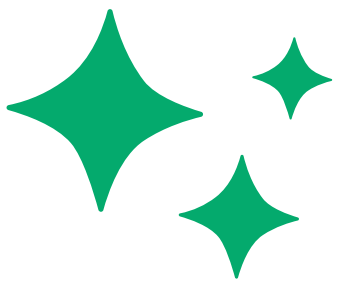

Read more about it 

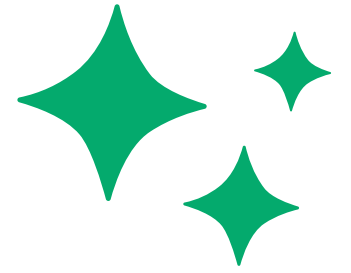

() - PARENTHESES

Used for function calls, conditions, and grouping

{ } - CURLY BRACES:

Often used to define code blocks

[] - SQUARE BRACKETS

Commonly used for lists, arrays, and indexing

;- SEMICOLON

Often marks the end of a statement or instruction.

:- COLON

Used in various contexts, like dictionaries and ternary operators.





= - ASSIGNMENT

Assigns a value to a variable.

== - EQUALITY

Checks if two values are the same.

!= - NOT EQUAL

Checks if two values are different.

, - COMMA

Used to separate elements, e.g., in lists or function arguments.

=== - STRICT EQUALITY

Checks if both the value and type of two variables are the same.





LEARN CODING AT

www.w3schools.com

